


WIRELESS LOADSHACKLE



- Capacidades de 3,25t a 500t, podendo ser obtidas até 3000t.
- Alcance sem fio de 1.000 m ou 3.280 pés.
- Cada Loadshackle é testado à prova.
- Eletrônica alojada em gabinete anodizado duro.
- Ambientalmente vedado para IP67 ou NEMA6.
- Duração da bateria de 1200 horas com 4 pilhas AA.
- Antena interna.
- Ativação/desativação remota a partir do monitor portátil ou software.
- Fornecida com bobina centralizadora de carga.
- 2 anos de garantia.
- Em conformidade com ASME B30.26.
- Projeto validado pela FEA.
- Zonas ATEX 0, 1 e 2 disponíveis.
- A opção Bluetooth está disponível e é fornecida por um aplicativo gratuito para iOS e Android

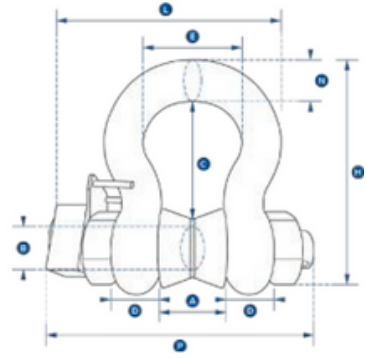

Part Numbers	WLS3.25T	WLS6.5T	WLS12T	WLS25T	WLS55T	WLS85T	WLS120T	WLS200T	WLS300T	WLS400T	
Crosby	2789186	2789200	2789183	2789185	2789199	2789201	2789172	2789184	2789188	2789189	
Capacity	(te)	3.25	6.5	12	25	55	85	120	200	300	400
	(lb)	7,150	14,300	26,400	55,000	120,000	185,000	260,000	440,000	660,000	880,000
Resolution	(te)	0.005	0.005	0.01	0.02	0.05	0.05	0.1	0.2	0.5	0.5
	(lb)	10	10	20	50	100	100	200	200	1000	1000
Units	(metric)	metric tons									
	(imperial)	pounds									
Weight	(kg)	2.8	3.2	8	18	25	85	125	260	405	662
	(lb)	6.16	7	17.6	40	55	187	276	573	893	1459
Design Factor	5:1 when used with load bobbin										
Battery Type	Loadcell 4 x AA Alkaline										
Battery Life	Loadcell 1200 hours continuous (500 hours if Bluetooth)										
Operating Temp.	-10°C to +50°C / 14°F to 122°F										
Accuracy	±1% full scale										
Frequency	2.4 GHz										
System Range (max)	1000 meters / 3280 feet (100 meters / 328 feet if Bluetooth) (500 meters / 1640 feet if ATEX/IECEx)										
Data Rate	3 updates per second										
Protection	IP67 / NEMA6										
Dimension A	(mm)	26.9	36.6	51.5	73	82.5	127	144	180	205	230
	(in)	1.06	1.44	2.03	2.87	3.25	5.00	5.66	7.09	8.07	9.06
Dimension ØB	(mm)	19.1	25.4	35.1	51	57	83	95	125	150	175
	(in)	0.75	1.00	1.38	2.01	2.24	3.26	3.74	4.92	5.91	6.89
Dimension C	(mm)	56.9	79.7	113	170	189.5	317	364	432.2	505	547.7
	(in)	2.24	3.14	4.45	6.69	7.46	12.48	14.33	17.02	19.88	21.56
Dimension D	(mm)	14.46	20.6	29.5	44.5	51	80	89	110	120	160
	(in)	0.57	0.81	1.16	1.75	2.01	3.14	3.50	4.33	4.72	6.30
Dimension E	(mm)	42.9	58	82.5	127	146	190	238	280	305	325
	(in)	1.69	2.28	3.25	5.00	5.75	7.48	9.37	11.02	12.01	12.80
Dimension H	(mm)	106	148	210	313	348	539	624	769	904	1006.5
	(in)	4.17	5.83	8.27	12.32	13.70	21.22	24.56	30.28	35.59	39.63
Dimension L	(mm)	135	156.5	201	275	306	393	445	529.7	586.7	667.2
	(in)	5.31	6.16	7.91	10.83	12.05	15.47	17.51	20.85	23.10	26.27
Dimension N	(mm)	17.5	24.6	35.1	57	61	85	95	120	140	160
	(in)	0.69	0.97	1.38	2.24	2.40	3.34	3.74	4.72	5.51	6.30
Dimension P	(mm)	150	173	222	290	317	448	488	600	657	765
	(in)	5.91	6.81	8.74	11.42	12.48	17.63	19.21	23.62	25.87	30.12
Crosby Shackle		G2130				G2140			S2135		

