


BOLT ON LINE TENSIONMETER (BOLT)



- Construído em alumínio de grau aeroespacial.
- Projetado para ser montado em uma posição permanente em cabo ou cano de arame para monitorar com precisão medições de tensão de até 20.000lb ou 10.000 kg e até 1,25 pol ou 32 mm de diâmetro.
- Sem fio proprietário de 2,4 GHz.
- Alcance sem fio líder de 1000m/32801 quando conectado ao SW-HHP, permitindo que você leia até quatro células de carga simultâneas.
- Alcance ilimitado quando conectado ao BasoStation para monitorar remotamente.
- Fornecerá visitas ao local reduzidas, melhorará a tomada de decisões e monitorará com segurança as tensões de linha em qualquer distância de qualquer lugar do mundo.
- Duração incomparável da bateria de 1200 hm.
- Múltiplas gotas testadas a partir de 3 metros ou 10 pés.
- Antena interna.
- Controle remoto ligado/à traseira da tela portátil ou do software

Part Numbers SP	BOLT10T
Crosby	2789573
Max Load	10 t 22000 lb
Resolution	0.01 t 20 lb
Units	kilograms, pounds, metric tons and kilonewtons
Min Wire Rope Ø	16 mm 5/8"
Max Wire Rope Ø	32 mm 1 1/4"
Weight	2.1 kg 4.6 lb
Battery Type	4 x 'AA' cell batteries
Battery Life	1200 hours
Operating Temp.	-10°C to +50°C / 14°F to +122°F
Protection	IP67 / NEMA6
Accuracy	Typically 3-5%
Communication	2.4 GHz
Dimension A	259 mm 10.20"
Dimension B	159.1 mm 6.26"
Dimension C	89 mm 3.50"

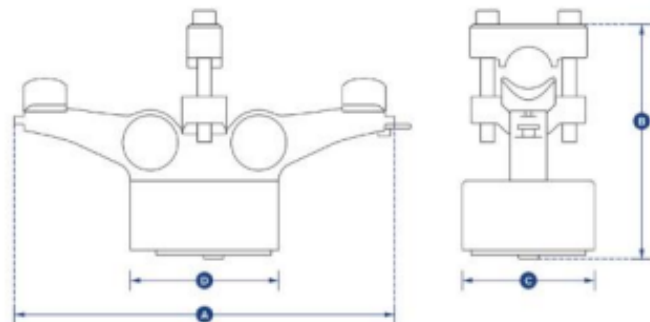

**VÍDEOS DE TREINAMENTO
DO CROSBY
STRAIGHTPOINT**



Crosby
|
SP